



2 cable balancer with independent spring for each cable. Springs treated with rust preventative.

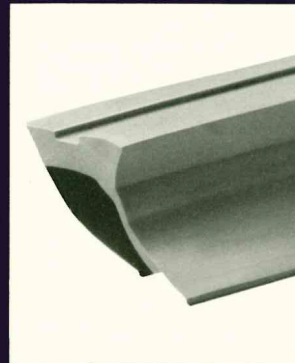


Replaceable side seals have two legs creating a double seal.

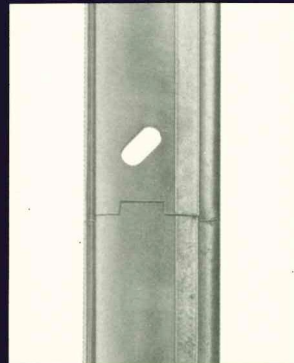

2", 13 gauge galvanized steel track with tongue-and-groove for proper alignment at joints.



Center hinge incorporates contoured design to prevent hinge from damaging cargo.

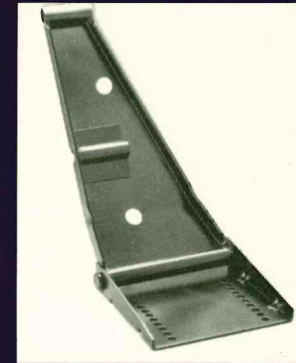


Top closure bracket designed to eliminate need for having 2 tracks to carry top section.

# Whiting TempGuard<sup>®</sup> fiberglass door

For temperatures of  
20°F/-7°C and above

"You have to build a quality product  
in order to stay in business,  
Whiting will build quality products."

*-Business philosophy of Theo Whiting, on founding  
Whiting Roll-up Door Manufacturing Corp. (1953)*

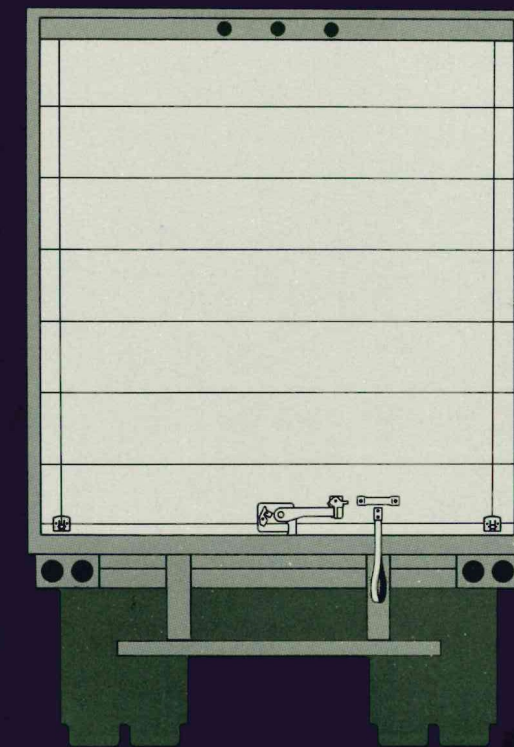

**General Offices:**  
113 Cedar Street  
Akron, New York 14001  
Phone: (716) 542-5427  
FAX: (716) 542-5947

**Rialto, CA**  
Phone: (909) 877-0120  
FAX: (909) 877-9180

**St. Louis, MO**  
Phone: (314) 741-6880  
FAX: (314) 741-7450

**Manufacturers of:**  
SEA-LOK swinging doors  
And these quality roll-up doors:

- Whiting PREMIUM
- CARGOSAVER
- COLDSAVER
- TEMPGUARD
- HINGELESS TRUSS
- HINGED TRUSS
- GENERAL PURPOSE
- CARGOGUARD
- EXTRUDED ALUMINUM




# The Company that developed the World's first practical roll-up truck door


## Now brings you the World's best (very best) refrigerated roll-up truck door


### Introducing Whiting's TempGuard® fiberglass door

For temperatures of 20°F/-7°C and above

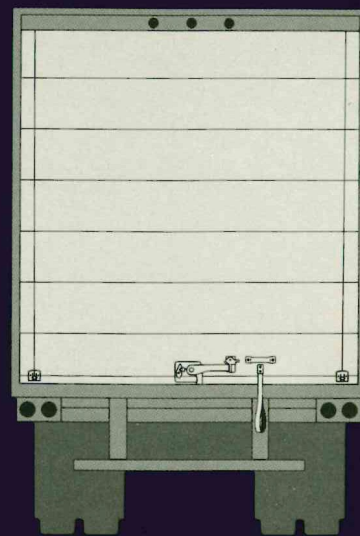

- No thru-metal rivets to conduct heat
- One piece fiberglass panels will not delaminate, corrode or rot
- Pre-painted baked-on aluminum face – finish will last as long as the sides of your truck body
- Stainless steel face optional
- Ultra smooth surface, perfect for your decal or painted logo


 No other truck or trailer roll-up delivers such consistent temperature control.

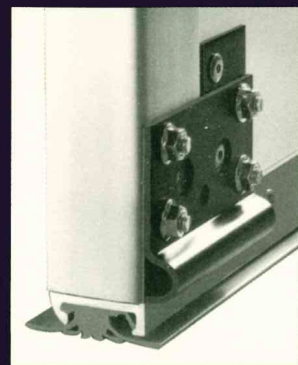


Removable bottom roller bracket designed for easy roller replacement.




Two compression seals at each panel joint. No thru-metal fasteners.

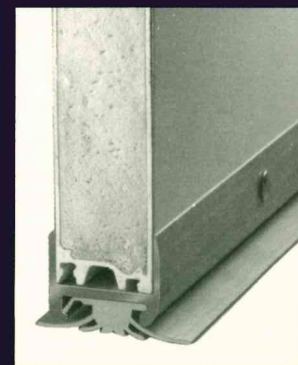


Rigid bottom U-channel with replaceable vinyl bottom seal

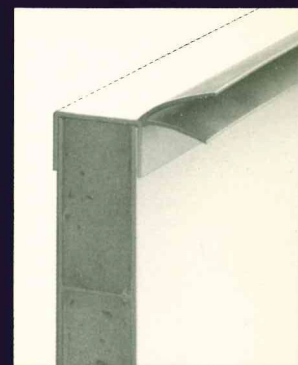

Dual durameter PVC top seal. Rigid section of seal forms cap at top of door to strengthen top panel

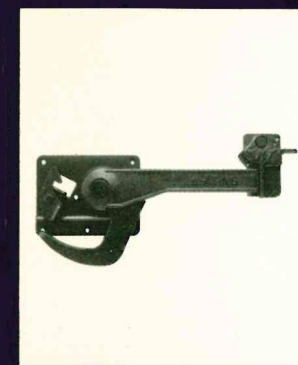

Cam lock allows one hand operation. Easily accommodates padlock or car seal

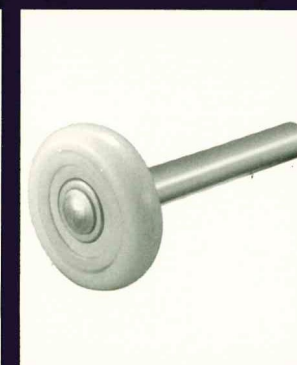

2" nylon roller for strength and long life



End hinge and roller carrier. Removable cap allows roller change without removing hinge.



The best thing to happen to products that require refrigeration in a long time.